

Digital Signage Conferencing First & Event



OSL-3201 - Metal Frame Type


Key Features

- 32" LCD TFT public display
- 1366 x 768 resolution
- 4000:1 contrast
- 450 cd/m² high brightness
- 178° (h/v) wide viewing angle
- array of connectors
- metal frame housing
- built-in video wall function
- portrait/landscape orientation
- remote control



Display Panel	Panel Technology	LCD TFT PVA	
	Screen Size (inch cm)	32" 81,28	
	Active Display Area (mm)	697.68 x 392.25	
	Number of Pixels	1366 x 768 (WXGA)	
	Aspect Ratio	16 : 9	
	Display Colors	16.7 Mil.	
	Brightness (cd/m ²)/(typ)	450	
	Contrast Ratio	4.000 : 1	
	Response Time (ms, GTG)	8	
	Viewing Angle (H/V)	178°/178°	
	Life Time	50,000h	
	Housing	black powder coated metal	
Resolution	Monitor	1366 x 768	
	DTV (without tuner)	1080i	
Connectivity & Control	Input	VGA (15pin D-Sub)	1
		HDMI	1
		Composite Component (BNC)	1 1
		Audio: PC Component Composite	1 1 1
		RS232C	1
	Output	VGA (15pin D-Sub)	1
		DVI (Connected type HDMI)	1
		Composite Component (BNC) RS-232C	1 1
		RS232C	1
		Speaker (ready)	1
	Integrated Video Wall Function (Multi-Screen)	HDMI, VGA (15pin D-Sub), Component (BNC), Composite (BNC)	
	Power Requirement	Input Voltage	100 - 240VAC
Consumption /operation (typ) (W)		130	
Consumption /DPMS (typ) (W)		2	
Auto Cooling System	yes (1EA)		
Auto Power Control (DPMS)	yes (optional set-up)		
Feature	Touch Screen	Option (Model: OLS-3201T)	
Mechanical	Dimension (mm)	Set (W x H x L) (mm)	764 x 454 x 114.3
		Bezel Size (U/D/L/R) (mm)	30/30/32/32
		Packed (W x D x H) (mm)	917 x 642 x 253
		Wall Mounting Hole (W x H mm)	400 x 200
	Weight (kg)	Set (kg)	19
Packed (kg)		22,5	
Approvals	EMI/EMC Safety	FCC, CE cTUVus, TUV, CB	
Environmental Conditions	Temperature Humidity	0°- 40° 20% - 80%	
OSD Languages		10	
Accessories		power cord, HDMI cable, D-Sub cable, user manual, remote control	

Mechanical Drawing

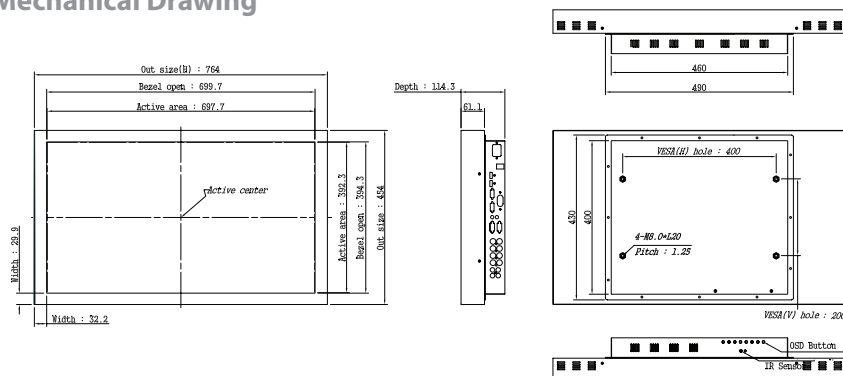

Technical details are subject to change without further notice.
Errors excepted. Version: as of October 2009.