


Digital Signage Conferencing First & Event



OLS-4001 - Metal Frame Type


Key Features

- 40" LCD TFT public display
- 1920 x 1080 resolution
- 4000:1 high contrast
- 450 cd/m² high brightness
- 178° (h/v) wide viewing angle
- array of connectors
- metal frame housing
- built-in video wall function
- portrait/landscape orientation
- auto cooling system
- remote control

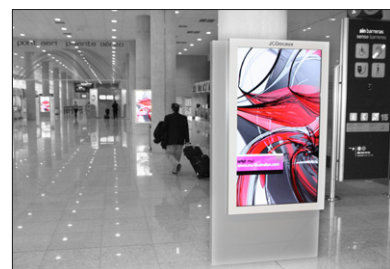

| | | | |
|-----------------------------------|---|--|------------------------|
| Display Panel | Panel Technology | LCD TFT PVA | |
| | Screen Size (inch cm) | 40" 101,6 | |
| | Active Display Area (mm) | 885.6 x 498.15 | |
| | Number of Pixels | 1920 x 1080 (WUXGA) | |
| | Aspect Ratio | 16 : 9 | |
| | Display Colors | 16.7 Mil. | |
| | Brightness (cd/m ²)/(typ) | 450 | |
| | Contrast Ratio | 4.000 : 1 | |
| | Response Time (ms, GTG) | 8 | |
| | Viewing Angle (H/V) | 178°/178° | |
| | Life Time | 50,000h | |
| | Housing | black powder coated metal | |
| Resolution | Monitor | 1920 x 1080 | |
| | DTV (without tuner) | 1080p | |
| Connectivity & Control | Input | VGA (15pin D-Sub) | 1 |
| | | HDMI | 1 |
| | | Composite Component (BNC) | 1 1 |
| | | Audio: PC Component Composite | 1 1 1 |
| | | RS232C | 1 |
| | Output | VGA (15pin D-Sub) | 1 |
| | | DVI (Connected type HDMI) | 1 |
| | | Composite Component (BNC) RS-232C | 1 1 |
| | | RS232C | 1 |
| | | Speaker (ready) | 1 |
| | Integrated Video Wall Function (Multi-Screen) | HDMI, VGA (15pin D-Sub), Component (BNC), Composite (BNC) | |
| | Power Requirement | Input Voltage | 100 - 240VAC |
| | | Consumption /operation (typ) (W) | 200 |
| | | Consumption /DPMS (typ) (W) | 2 |
| Auto Cooling System | yes (1EA) | | |
| Auto Power Control (DPMS) | yes (optional set-up) | | |
| Feature | Touch Screen | Option (Model: OLS-4001T) | |
| Mechanical | Dimension (mm) | Set (W x H x L) (mm) | 956.5 x 555.5 x 118 |
| | | Bezel Size (U/D/L/R) (mm) | 26.7/ 26.7/ 33.5/ 33.5 |
| | | Packed (W x D x H) (mm) | 1078 x 693 x 245 |
| | | Wall Mounting Hole (W x H mm) | 400 x 200 |
| | Weight (kg) | Set (kg) | 32 |
| Packed (kg) | | 35,5 | |
| Approvals | EMI/EMC Safety | FCC, CE cTUVus, TUV, CB | |
| Environmental Conditions | Temperature Humidity | 0°- 40° 20% - 80% | |
| OSD Languages | | 10 | |
| Accessories | | power cord, HDMI cable, D-Sub cable, user manual, remote control | |

Mechanical Drawing

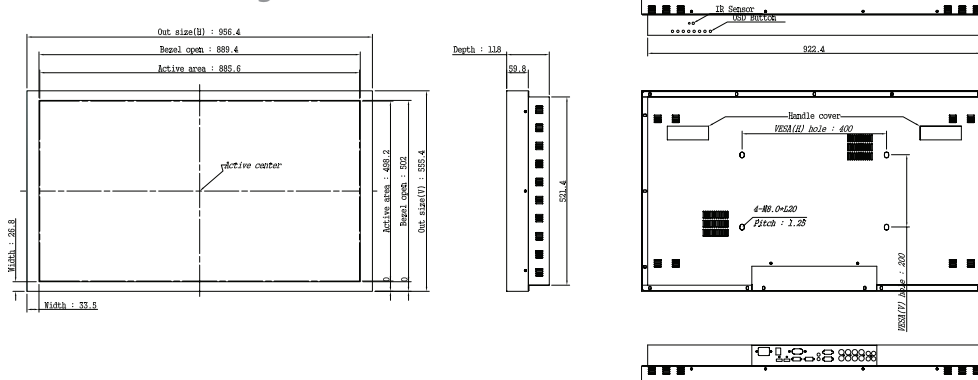

Technical details are subject to change without further notice.
Errors excepted. Version: as of October 2009.